

FT-10 IT-I

DD IT-I Series

GVWR LBS:

9,980

GAWR LBS:

14,000

WEIGHT LBS:


3,200

CAPACITY LBS:

6,780

- 6x12# I-beam Main Frame
- 3" (80K) Jr I-beam crossmembers
- 17" Avg on center
- See Option Page for Stationary Deck

- (1) Cushion Cylinder
- Deck Length = Tilt Angle
- 14' = 15 Degrees 16' = 13 Degrees
- 18' = 12 Degrees 20' = 11 Degree

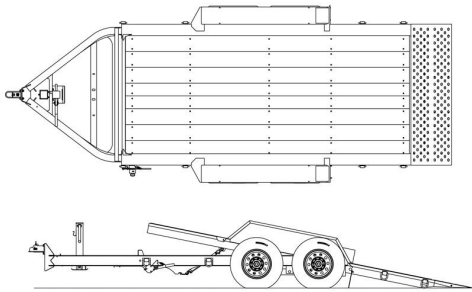

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Tilt Deck Length	X	16.00	Feet
Deck Type	Pressure Treated Wood	X	1.00	Std
Appx Deck Height	19.5" Loaded, 22" Unloaded	X	1.00	Inches
Width	102" OD, 82" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8 Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	7K Dexter, Drop	X	2.00	Std
Axles, Acc	Dexter EZ-Lube Hubs	X	1.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	ST235/80R 16 E, 8 Bolt [16 x 6] White Mod	X	4.00	Opt
Hitch Length	Center of Coupler to Headboard, Appx - Adj Hitch Range 13.5" to 22.5" (18" to 22.5" if Hyd)	X	5.00	Feet
Hitch Type	2 5/16" Ball Adjustable, [B] 21,000 lb Plate Mount	X	1.00	Each
Jack	12K Drop Leg, Side Wind	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED,4 tail light system, Sealed Wiring Harness (Tail lights located on rear of fenders)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Single Cushion Cylinder	X	1.00	Std
GVWR	Derated to 9,980 lbs	X	1.00	Std